


5X7 Dot Character VFD Module

FC20X2JA-AB

- ❑ 40 Char. in 2 lines of 20 Characters 5mm High
- ❑ High Speed Parallel/Serial Interface
- ❑ Operating Temp -20°C to +70°C
- ❑ Single 5V Supply
- ❑ High Brightness Blue Green Display
- ❑ ASCII Character Font
- ❑ User Definable Character RAM

The module includes the Vacuum Fluorescent Display glass, driver and micro-controller ICs with refresh RAM, character generator and interface logic. The high speed 8 bit parallel interface is 5V CMOS compatible suitable for connection to a host CPU bus. The asynchronous serial interface accepts baud rates of 9,600. Two character font tables can be hardware selected. A user defined character and many control commands are available.

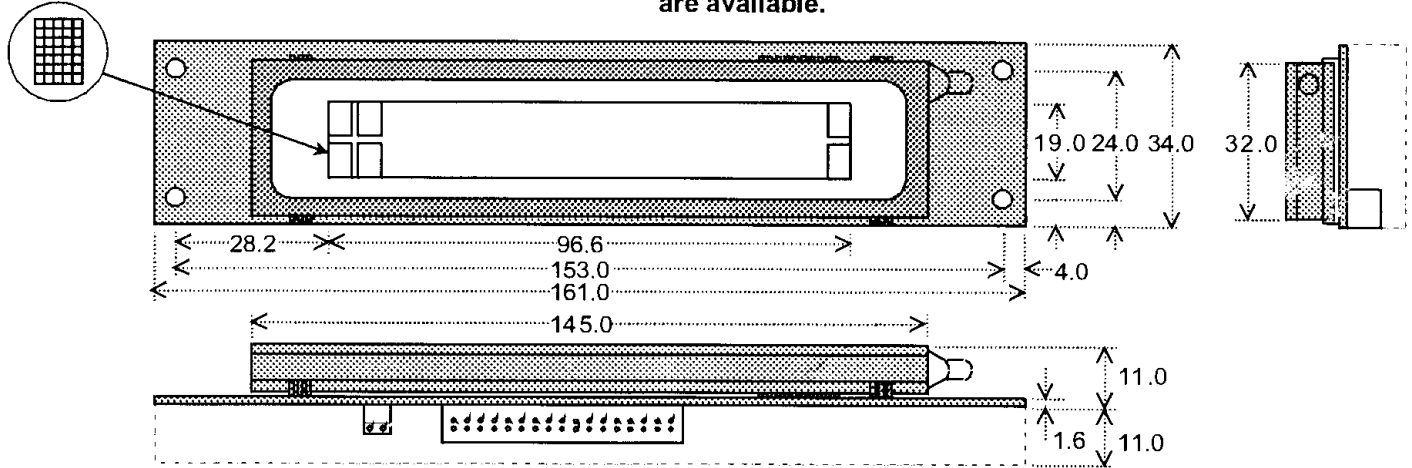

ELECTRICAL SPECIFICATION

Parameter	Symbol	Value	Condition
Power Supply Voltage	Vcc	5.0VDC +/- 5%	GND=0V
Power Supply Current	Icc	0.4ADC typ.	Vcc=5V
Logic High Input	V _{IH}	2.0VDC min.	Vcc=5V
Logic Low Input	V _{IL}	0.8VDC max.	Vcc=5V
Logic High Output	V _{OH}	3.5VDC min.	I _{OH} = -2.0mA
Logic Low Output	V _{OL}	0.4VDC max.	I _{OL} = 2.0mA

The power on rise time should be less than 50ms. The inrush current at power on can be 2 x Icc.

OPTICAL and ENVIRONMENTAL SPECIFICATIONS

Parameter	Value
Character Size/Pitch (XxY mm)	3.5 x 5.0/4.9 x 8.0
Dot Size/Pitch (XxY mm)	0.5 x 0.5/0.75 x 0.75
Luminance	1000 cd/m ² (291 F1) Typ.
Colour of Illumination	Blue-Green (Filter for additional colours)
Operating Temperature	-20°C to +70°C
Storage Temperature	-40°C to +85°C
Operating Humidity	0 to 85% RH @ 25°C

SOFTWARE COMMANDS

Instruction	D0-D7	Instruction	D0-D7
100% Luminance	01H	Scroll write	12H
75% Luminance	02H	Cursor On	13H
50% Luminance	03H	Cursor Off	14H
25% Luminance	04H	Cursor Flashing	15H
Back Space	08H	Underline Cursor	16H
Horizontal Tab	09H	Block Cursor	
Line Feed	0AH	Inverse Cursor	18H
Clear Display	0CH	User Defined Character	1AH
Carriage Return	0DH	ESCAPE	1BH
Normal Write	11H		

TIMING PARAMETERS (min)

Data Set Up To Write	10ns
Write Pulse Width	100ns
Hold After Write	25ns

2 PIN POWER CONNECTOR

Pin	Sig
1	Vcc (5V)
2	GND (0V)

INTERFACING

Mates with AMP171826

Function	/CS	/WR	A0	/BL	/To
Character Data Write	0	0→1	0	X	X
Command Data Write	0	0→1	1	X	X
Blanking	X	X	X	0	X
Test Mode	X	X	X	X	0

Dimensions in mm & subject to tolerances. Mounting holes 3.5mm dia.

CHARACTER FONTS

00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F	00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F	
00																																
01																																
02																																
03																																
04																																
05																																
06																																
07																																
08																																
09																																
0A																																
0B																																
0C																																
0D																																
0E																																
0F																																

IDC DATA CONNECTOR

Pin	Sig	Pin	Sig
1	D7	2	GND (0V)
3	D6	4	GND (0V)
5	D5	6	GND (0V)
7	D4	8	GND (0V)
9	D3	10	GND (0V)
11	D2	12	GND (0V)
13	D1	14	GND (0V)
15	D0	16	GND (0V)
17	/WR	18	GND (0V)
19	A0	20	GND (0V)
21	NC	22	GND (0V)
23	/CS	24	GND (0V)
25	T0	26	GND (0V)
27	BUSY	28	GND (0V)
29	/BL	30	GND (0V)
31	NC	32	GND (0V)
33	RXD	34	GND (0V)

PCB JUMPERS (O)PEN (L)INK x-don't care

Baud	J2	J1	J0
1200	L	O	O x
2400	L	O	L x
4800	L	L	O x
9600	L	L	L x

NC = No Connection

Subject to change without notice.
Detailed specification on request.
IUK Doc Ref:03032 Iss:1 28SEP00